




GN2000

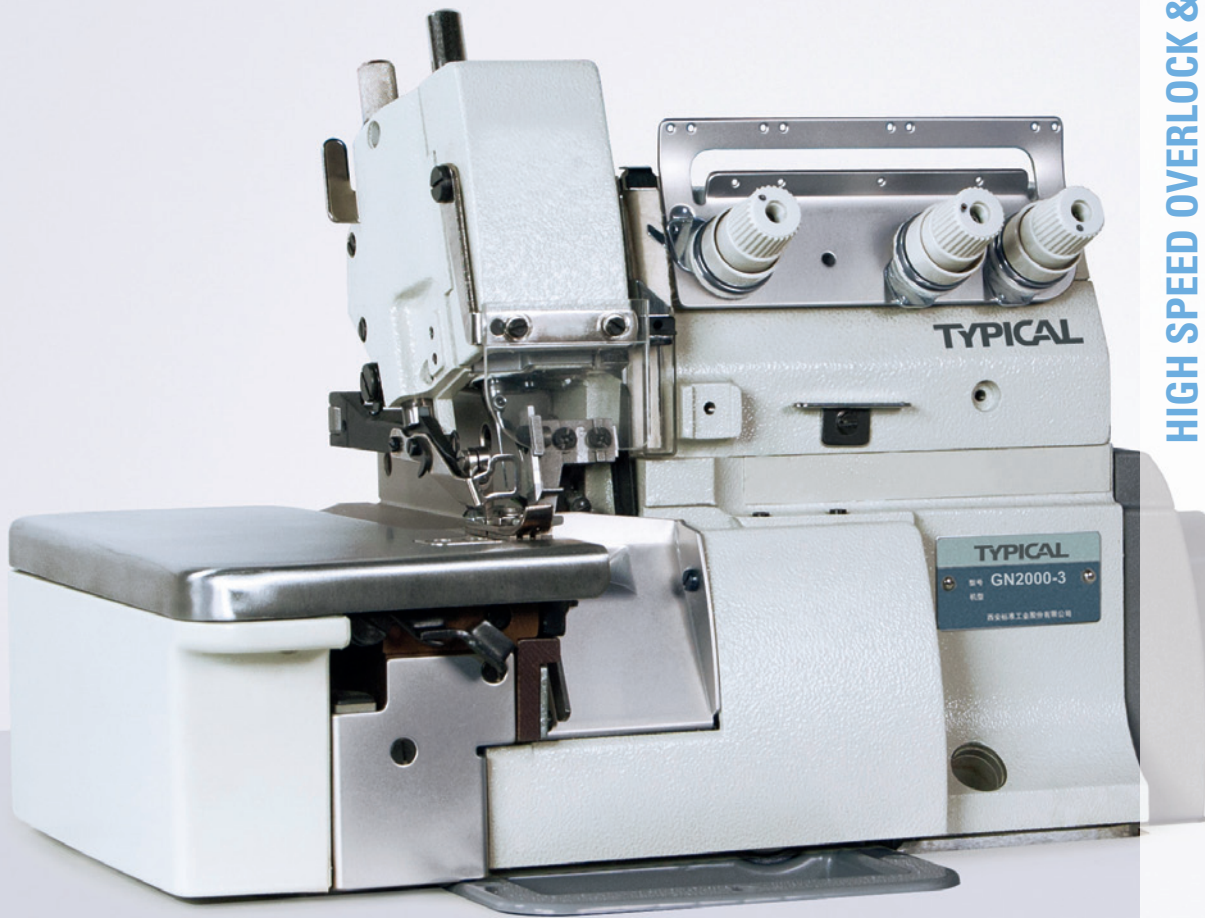

**HIGH SPEED OVERLOCK &
SAFETY-STITCH SEWING MACHINE**
**HOCHLEISTUNGS-, OVERLOCK- UND
SICHERHEITSNÄHT-NÄHMASCHINE**

TYPICAL

**HIGH SPEED OVERLOCK &
SAFETY-STITCH SEWING MACHINE
HOCHLEISTUNGS-, OVERLOCK- UND
SICHERHEITSSNAHT-NÄHMASCHINE**

GN2000

Technical Data

- Differential drop feed with fast adjustment
- Color-coded thread guide for easy threading
- Synchronized needle guard on looper carrier for continuous seam quality
- Fully automatic lubrication with oil filter
- Push-button stitch length regulator
- Balance wheel 55 mm eff. Dia.
- **GN2000-3** | 1 needle, 3 thread high-speed overlock sewing machine
- **GN2000-4** | 2 needle, 4 thread high-speed overlock sewing machine
- **GN2000-5** | 2 needle, 5 thread high-speed safety stitch sewing machine
- **GN2000-6** | 3 needle, 6 thread high-speed safety stitch sewing machine; Stichtype 514 + 401

Carton dimensions and gross weights for sewing head

- 48x37x47 cm, 34 kg

Technische Daten

- Differential-Untertransport mit Schnellverstellung
- Farbmarkierte Fadenführungen erleichtern das Einfädeln
- Mitgehender Nadelschutz am Greiferträger sichert eine durchgängige Nahtqualität
- Vollautomatische Druckumlaufschmierung mit Ölfilter
- Druck-Knopf-Stichsteller
- Handrad-Durchmesser effektiv: 55 mm
- **GN2000-3** | 1-Nadel, 3 Faden Hochleistungs-Overlock-Nähmaschine
- **GN2000-4** | 2-Nadel, 4 Faden Hochleistungs-Overlock-Nähmaschine
- **GN2000-5** | 2-Nadel, 5 Faden Hochleistungssicherheitsnaht-Nähmaschine
- **GN2000-6** | 3-Nadel, 6 Faden Hochleistungssicherheitsnaht-Nähmaschine; Stichtype 514 + 401

Kartonmaße und Brutto-Gewichte für Nähkopf

- 48x37x47 cm, 34 kg




Model	Configuration	Needles	Threads	Stitch Type	Speed (rpm)	Stitch Length (mm)	Stitch Width (mm)	Stitch Density	Stitch Length (mm)	Stitch Width (mm)
GN2000-3		1	3	0.5 - 3.8	4	-	5.5	0.7-1.7		
	B	1	3	0.5 - 3.8	1,5	-	5.5	0.7-1.7		
GN2000-4	H	2	4	0.5 - 3.8	4	2	6	0.7-1.7		
	H-A*	2	4	0.5 - 3.8	4	2	6	0.7-1.7		
	G**	2	4	0.5 - 3.8	-	5	3.5	0.7-1.7		
GN2000-5	(3x5)	2	5	0.5 - 3.8	5	3	5.5	0.7-1.7		
	(5x5)	2	5	0.5 - 3.8	5	5	5.5	0.7-1.7		
	5H	2	5	0.6 - 5.3	6	5	6	0.6-1.3		
	5H-A*	2	5	0.6 - 5.3	6	5	6	0.6-1.3		
GN2000-6	(3x2x4)	3	6	0.5 - 3.8	4	3+2	5.5	0.7-1.7		

* with angled edge knife for extra heavy duty materials mit Winkelkantenmesser für extra schwere Materialien

Specifications can differ depending on model. Angaben können je nach Ausführung abweichen.

** for binding operations für Einfassarbeiten



XI'AN TYPICAL EUROPE GmbH

Hertelsbrunnerring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com